
MANIFOLD
MF5V
Suitable for BP400 Differential Pressure Gauges

MF5V

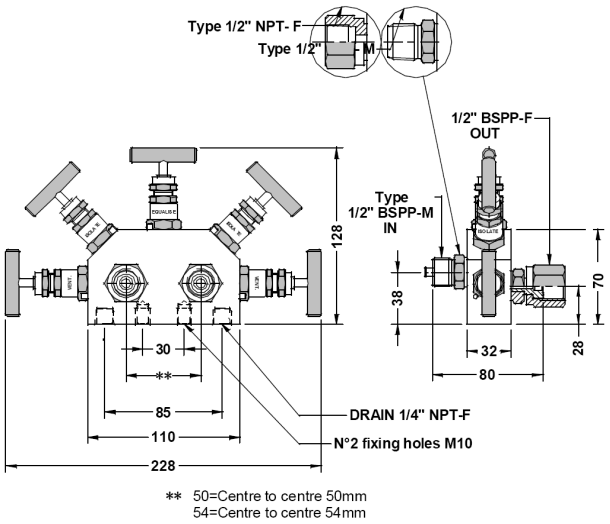

** 50=Centre to centre 50mm
54=Centre to centre 54mm

Type : barstock type 5 valve manifold for direct mounting
Material : Carbon Steel ; AISI 316
Process side connections : ½" NPT o BSP
Instrument side connections : ½" BSP F swivel
Drain connection : ¼" NPT
Inter-axes connection : 50 or 54 mm
Use : Oil , hydrocarbons, compatible acids, ammonia
Max pressure : 6000 PSI

IN	OUT	Material	Packing
½" BSPM	½"BSPF	Carbon Steel	Grafoil
½" BSPM	½"BSPF	Carbon Steel	PTFE
½" BSPM	½"BSPF	AISI 316L	Grafoil
½" BSPM	½"BSPF	AISI 316L	PTFE
½" NPTM	½"BSPF	Carbon Steel	Grafoil
½" NPTM	½"BSPF	Carbon Steel	PTFE
½" NPTF	½"BSPF	AISI 316L	Grafoil
½" NPTF	½"BSPF	AISI 316L	PTFE

HOW TO ORDER Please specify: model, construction material, INLET connection, OUTLET connection, options if any
Example : MF5V, AISI316, inlet 1/2" BSPF, outlet 3/8" BSPF

Web: www.pci-instruments.com | Email: sales@pci-instruments.com | Tel: +44 (0)1704 509090